

















SPECIAL FEATURES

Inverter alternator

Pure wave sine with THD≤3% Output current very steady Can application for precision machines

Automatic start function by potential-free NO contact

Alternator

99.9% Copper wire alternator Longer service life

Engine:

EURO V OHV SC460
Engine with high combustion burner efficiency and smaller vibration

Function:

Overload and over current protection, more safety while using


SPECIFICATION

Frequency	50HZ
Voltage	230V
T.H.D	<3%
AC 230V Máxima / Maximum	8000watt
AC 230V Nominal / Rated	7000watt
Starting type	Recoil -Electric-Automatic by signal contac NA as solar system backup
Number phase	Single Phase
Power factor	1.0
Engine model	SC460
Displacement	459cc
Engine type	Gasolina 4 stroke OHV air cooling
Noise Level (@1/4 load, 7m)	73dB
Fuel tank capacity	25L
Run time (50%-100% load)	13-8h
Oll grade and capacity	1.1L SAE10w30
Insulation grade	н
Wheel kit	9.5"*2
Dimensions	708x560x585mm
Weight	83kg





CONTROL PANEL

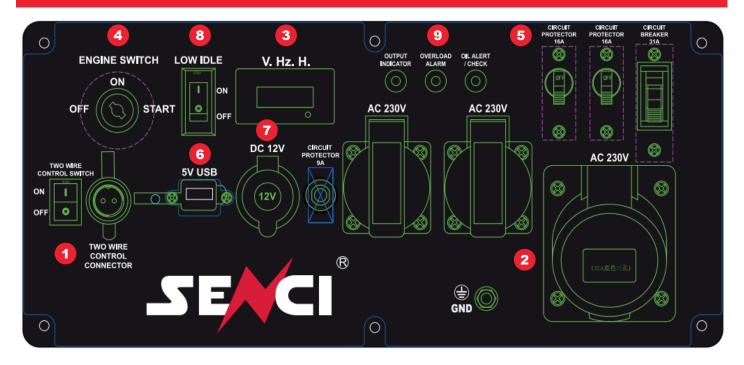

- 1. Two Wire Control Connector & Switch | Automatic by signal contac NA as solar system backup
- 2. 2*16A + 1*32A Socket
- 3. Three in One Display (V, Hz, H)
- 4. 3 in 1 Switch + Key Start
- 5. 2*16A Circuit Protector | 1*32A Breaker
- 6. 5V DC Port
- 7. 12V DC Cigarette socket
- 8. Low Idle
- 9. Oil Alarm | Overload Alarm | Output Indicator